

## T-Seals

T-seals are used when an O-ring's outstanding ability to seal over a wide range of pressures and temperatures is required, but an improved solution with greater resistance to extrusion and twisting is also necessary.

T-seals fit into existing O-ring grooves, so no re-machining or redesign of the existing hardware is involved. As a result, field changes and new equipment manufacturing are both made easier.

CTG's experienced engineers will custom tailor T-seals to your exact requirements, and manufacture 1 or 1,000 seals to your specifications that same day.




*CTG can create T-seals to your exact specifications*

### Design Considerations

A T-seal consists of a ring of elastomeric material that has a T-shaped cross section, and two bands of relatively rigid material that belong on either side of the elastomer ring. The ring acts as the sealing component of the unit, and the two rigid bands act as backup rings that prevent extrusion of the elastomer ring into the extrusion gap of the gland.

As a bonus, the backup rings in a T-seal serve an additional purpose: they firmly hold the sealing component to the floor of the gland, preventing the seal from twisting. As a result, T-seals are practically immune to spiral failure.

For maximum seal longevity, the seal must be constructed from the correct elastomer for the particular application. CTG can build seals from elastomers that tolerate high or low temperatures, high or low pressures, dynamic applications, and corrosive environments. If you are unsure which material would be best, ask us—our engineers will select the right material for your situation.

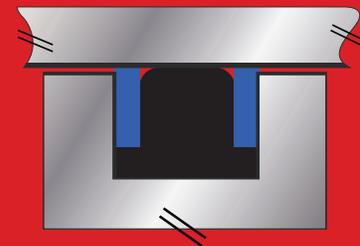

*Piston-style T-seal installed in the head of a piston*



*Rod-style T-seal installed between piston shaft and barrel*

### Applications

- Oilfield hydraulic pistons and rods
- Other static or reciprocating applications
- High or low temperatures
- High or low pressures
- Corrosive environments

### Benefits

- Fabricated from custom materials to meet the exact needs of the application
- Directly replaces an O-ring in the same size gland (no re-machining or redesign required)
- Highly resistant to spiral (twisting) failure
- Highly resistant to extrusion
- Gives a tight, leak-proof seal
- Usable with comparatively large extrusion gaps
- Provides prolonged service
- Requires minimum maintenance

The following table details the materials that are commonly used to construct our T-seals. If you are unsure which materials to use, our engineers will gladly help you determine the optimum composition of your T-seals.

Sealing Element Material	Temperature Range (°F)*	Comments
Nitrile (Buna-N, NBR)	-20 to 212	Highly resistant to abrasion and tearing. Nitrile is the most commonly used elastomer for sealing applications, and it is the material of choice for petroleum applications.
Hydrogenated nitrile (HNBR)	-20 to 300	Compared to nitrile, HNBR has better chemical resistance, better heat resistance, and better resistance to seal extrusion.
Ethylene-propylene (EPDM)	-60 to 250	Very resistant to ozone.
Neoprene	-40 to 250	Resists both weathering and exposure to petroleum oils.
Butyl (isobutylene, IIR)	-50 to 250	Extremely low gas permeability; resists a diverse range of chemicals. Useful in applications requiring an air-tight seal.
Viton® (fluorocarbon, fluoroelastomer)	-15 to 400	Better resistance to chemicals and high temperatures than most other elastomers.
Silicone (VMQ, PVMQ)	-150 to 400	Excellent tolerance for temperature extremes, and high resistance to compression set.
Fluorosilicone (FVMQ, FK)	-75 to 400	Tolerant to temperature extremes, and resists degradation by fuel and oils. Primarily used where resistance to hot, dry conditions is required.
FFKM (perfluoroelastomer)	-15 to 600	Highly resistant to many chemicals, and outstanding resistance to high temperatures.
Backup Ring Material		
PEEK	-100 to 550	A high-modulus material with excellent thermal and mechanical properties.
PPS	-40 to 425R	Can be machined to tight tolerances. Has the broadest resistance to chemicals of any advanced engineering plastic. Is inert to steam, strong bases, fuels, and acid. Has no known solvent below 392°F and does not absorb moisture.
Nylon	-20 to 210	Tough, and resistant to abrasion. Good resistance to hydrocarbons, aromatic and aliphatic solvents, common automotive oils and lubricants, and refrigerants. Items fabricated with nylon can be used without lubrication.
PTFE	-400 to 450	Highly resistant to many chemicals, and can function over a very wide temperature range. Also resists weathering.

\*Temperature ranges given here are approximate; the values relevant to any particular situation depend upon the application. If you are unsure which material would be best for your case, ask us—we will help you design a T-seal that meets the temperature tolerance needs of your system.

**To discuss your application, give us a call!**



[ctgsales@ctgasket.com](mailto:ctgsales@ctgasket.com)

Address: 12308 Cutten Road | Houston, Texas US | 77066

US Toll Free: 1.800.299.1685

© CTG Inc., 2016. All rights reserved.

Trademarked brand or product names mentioned in this document are the property of their respective owners.

Although reasonable effort has been made to ensure that the information in this document is accurate, it is subject to change at any time without notice. CTG assumes no liability resulting from errors or omissions in this document. Data is provided for general illustrative purposes only; it is not to be used to create specification sheets for particular parts that CTG manufactures. It is the customer's responsibility to confirm that a selected material is appropriate for a particular situation, and to evaluate parts before using them. Furthermore, because elastomeric parts have a finite lifetime, CTG strongly recommends that customers inspect such parts frequently and replace them when necessary.